

I-SFT 100i.12SV 12.1" SVGA


battery powered applications
tough thermal management environments

tentative



- 1000 cd/m² Luminance
- Integrated Inverter
- Rugged System
- High energy efficiency
- Long Life CCFL
- Slim Design

www.i-sft.com

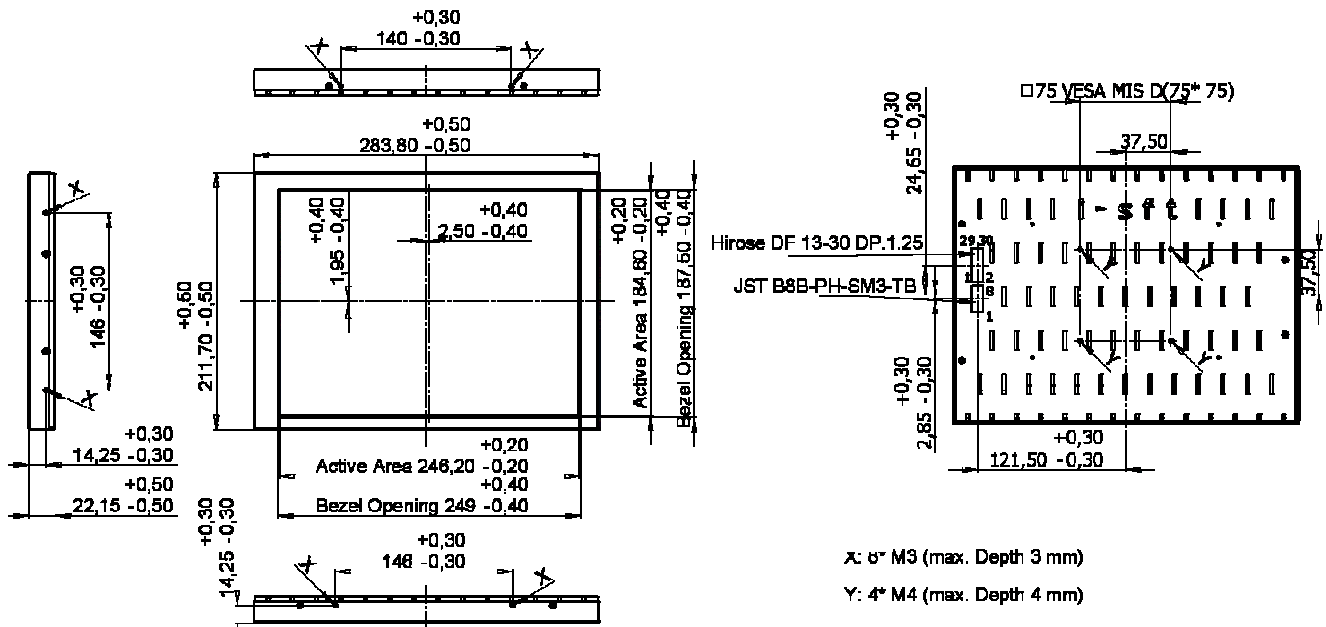

Resolution		SVGA
Colors	k (1024)	256
Screen Diagonal		12.1"
Luminance (typ.)	cd/m ²	1000
Dimming		1000 : 1
MTTH	Hours	>50.000
Contrast (typical)		500 : 1
Viewing Angle T/D	CR10 /°	50 / 55
Viewing Angle R/L	CR10 /°	55 / 55
Shock (Operating)	g; ms	tbд
Vibration (Operating)	g; Hz	tbд

Temperature (Operating)*	°C	- 10°C to 65°C
Temperature (Storage)*	°C	- 25°C to 70°C
Weight	g	1560
Input Signal		LVDS
Size (WxHxD)	Typ. mm	284 x 212 x 22
Outer Dimensions		
Power	Watt	12 (typ.)
Supply Voltage	V DC	24 int. Inverter 3.3 or 5 LCD

* extended temperature range on request